




Technical data WEITZER SPORT 35 OSB



35 OSB

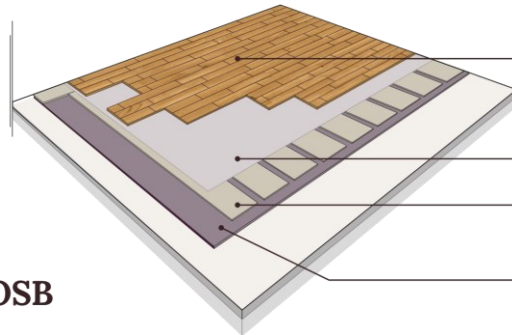

- ❶ **Weitzer Sport parquet 2245 ply**  
2245 x 193 x 12,6mm  
with 3,6mm wear layer from hardwood
- ❷ **PE – foil**
- ❸ **load distribution strips**  
12mm OSB
- ❹ **elastic layer**  
10mm rebound foam

Area-elastic sports flooring for sports and multi-purpose halls according to EN 14904 and DIN 18032-2; April 2001

Total construction height 34,6mm

1) Sport parquet WEITZER SPORT 2245 PLY  
3-strip multilayer parquet 2245x193x12,6mm  
Hardwood top layer 3,6mm  
Base from birch plywood, 7 layers  
4-side T&G-profile  
Finish PROSTRONG SPORT  
Stapled to counter floor  
Parquet front joints centred on counter floor  
Stagger: min. 400mm

2) PE-Foil Creak protection foil  
0,04mm thickness  
Loosely laid with approx. 100mm overlay

1) Load distribution strips OSB strips 173x12mm with approx. 2600mm of length  
T&G profile (glued) on short ends  
Distance/clearance: 76,4mm  
Centre distance: 249,4mm  
Stagger: min. 400mm

3) Elastic layer SPORT PUR cushion mat 10mm  
Loosely laid (full surface), staggered

WEITZER SPORT parquet incl. certified substructure may only be installed on a subfloor that complies with the current standards and guidelines in accordance with the manufacturer's processing specifications. The subfloor must be sufficiently even, load-bearing, solid and dry. Appropriate building physics measures to protect against receding moisture must be taken prior to installation.

