




Technical data WEITZER SPORT 36 OSB



- ① **Weitzer Sport parquet 2245 spruce**  
2245 x 193 x 14mm  
with 3,6mm wear layer from hardwood
- ② **PE - foil**
- ③ **load distribution strips**  
12mm OSB
- ④ **elastic layer**  
10mm rebound foam

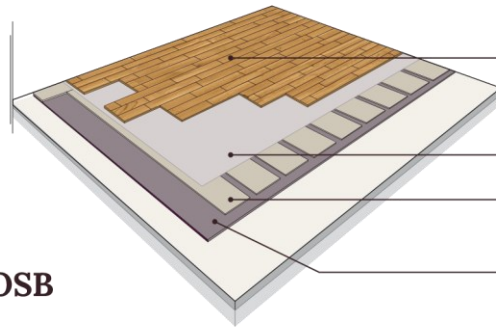

**36 OSB**

Area-elastic sports flooring for sports and multi-purpose halls according to EN 14904 and DIN 18032-2; April 2001

Total construction height 36,0 mm

- 1) Sport parquet  
WEITZER SPORT 2245 SPRUCE  
3-strip multilayer parquet 2245x193x14mm  
Hardwood top layer 3,6mm  
Middle layer: solid, quarter-cut spruce rods  
Bottom layer: rotary-cut spruce veneer  
4-side T&G-profile  
Finish PROSTRONG SPORT  
Stapled to counter floor  
Parquet front joints centred on counter floor  
Stagger: min. 400mm
- 2) PE-Foil  
Creak protection foil  
0,04mm thickness  
Loosely laid with approx. 100mm overlay
- 3) Load distribution strips  
OSB strips 173x12mm with approx. 2600mm of length  
T&G profile (glued) on short ends  
Distance/clearance: 107,6mm  
Centre distance: 280,6mm  
Stagger: min. 400mm
- 4) Elastic layer  
SPORT PUR cushion mat 10mm  
Loosely laid (full surface), staggered

WEITZER SPORT parquet incl. certified substructure may only be installed on a subfloor that complies with the current standards and guidelines in accordance with the manufacturer's processing specifications. The subfloor must be sufficiently even, load-bearing, solid and dry. Appropriate building physics measures to protect against receding moisture must be taken prior to installation.

