




Technical data WEITZER SPORT 58 SPRUCE



58 Spruce

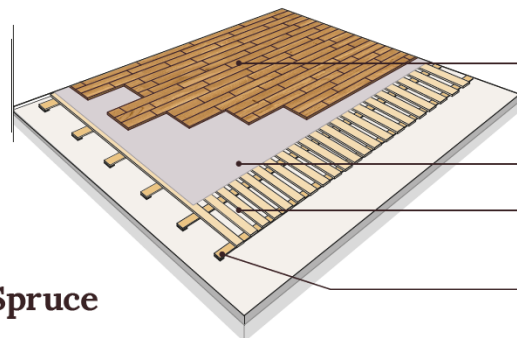

- ① **Weitzer Sport parquet 2245 spruce**
2245 x 193 x 14mm
with 3,6mm wear layer from hardwood
- ② **PE - foil**
- ③ **counter floor**
17mm spruce
- ④ **elastic beam**
27mm spruce incl. elastic pads

Area-elastic sports flooring for sports and multi-purpose halls according to EN 14904 and DIN 18032-2; April 2001

Total construction height 58,0mm

- 1) Sport parquet WEITZER SPORT 2245 SPRUCE
3-strip multilayer parquet 2245x193x14mm
Hardwood top layer 3,6mm
Middle layer: solid, quarter-cut spruce rods
Bottom layer: rotary-cut spruce veneer
4-side T&G-profile
Finish PROSTRONG SPORT
Stapled to counter floor
Parquet front joints centred on counter floor
Stagger: min. 400mm
- 2) PE-Foil Creak protection foil
0,04mm thickness
Loosely laid with approx. 100mm overlay
- 3) Counter floor Spruce boards grade I/III 4-side planed, KD
4000x96x17mm
Distance/clear approx. 42mm
Stapled to elastic beam, joints centred
Stagger: min. 2 elastic beams
- 4) Elastic beam 1-layer build-up 4000x96x27mm
Spruce boards grade I/III 4-side planed, KD
Elastic pads from SPORT PUR cushion mat 10mm

WEITZER SPORT parquet incl. certified substructure may only be installed on a subfloor that complies with the current standards and guidelines in accordance with the manufacturer's processing specifications. The subfloor must be sufficiently even, load-bearing, solid and dry. Appropriate building physics measures to protect against receding moisture must be taken prior to installation.