




Technical data WEITZER SPORT 82 SPRUCE



- ❶ **Weitzer Sport parquet 2245 ply**
2245 x 193 x 12,6mm
with 3,6mm wear layer from hardwood
- ❷ **PE - foil**
- ❸ **counter floor**
15mm spruce
- ❹ **double swing beam**
54mm spruce incl. elastic pads

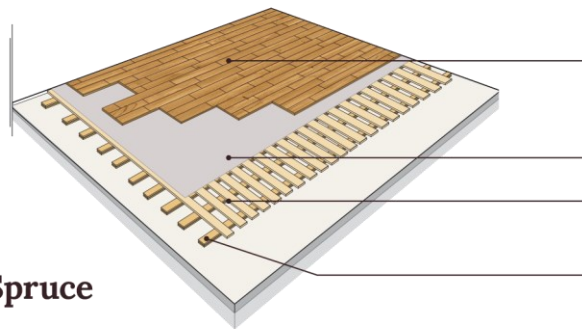

82 Spruce

Area-elastic sports flooring for sports and multi-purpose halls according to EN 14904 and DIN 18032-2; April 2001

Total construction height 82,6mm

- 1) Sport parquet WEITZER SPORT 2245 PLY
3-strip multilayer parquet 2245x193x12,6mm
Hardwood top layer 3,6mm
Base from birch plywood, 7 layers
4-side T&G-profile
Finish PROSTRONG SPORT
Stapled to counter floor
Parquet front joints centred on counter floor
Stagger: min. 400mm
- 2) PE-Foil Creak protection foil
0,04mm thickness
Loosely laid with approx. 100mm overlay
- 3) Counter floor Spruce boards grade I/III 4-side planed, KD
4000x90x15mm
Distance/clear approx. 42mm
Stapled to elastic beam, joints centred
Stagger: min. 2 elastic beams
- 4) Elastic beam 2-layer build-up 4000x60x65mm
With spruce boards, intermediate bar, elastic elements and supports
Spruce boards grade I/III 4-side planed, KD
Elastic pads from SPORT PUR cushion mat 10mm
Intermediate bars and supports from birch plywood

WEITZER SPORT parquet incl. certified substructure may only be installed on a subfloor that complies with the current standards and guidelines in accordance with the manufacturer's processing specifications. The subfloor must be sufficiently even, load-bearing, solid and dry. Appropriate building physics measures to protect against receding moisture must be taken prior to installation.

